

Telefonica

Documentação Normativa

Alteração de usuário e senha do modem D-Link 500B
Instrução

ÍNDICE

1. OBJETIVO.....	3
2. CONCEITOS	3
3. NORMAS GERAIS	3
4. PROCEDIMENTOS.....	3

1 - OBJETIVO

O objetivo deste documento é definir e padronizar o procedimento de alteração de usuário e senha do modem ADSL D-Link 500B.

2 - CONCEITO

ADSL – Abreviatura de “Assimetric Digital Subscriber Line”

3 - NORMAS GERAIS


Para realizar o compartilhamento do acesso a Internet em mais de um computador é necessário a utilização de um router.

4 - PROCEDIMENTOS

4.1 Alteração de usuário e senha do modem D-Link 500B


Abra o prompt de comando (**Iniciar > Executar > cmd <Enter>**) e digite os comandos **ipconfig /release** e **ipconfig /renew**.

Digite **10.1.1.1** no navegador de Internet.



No campo **Nome de usuário** digite: **admin**

No campo **Senha** digite: **admin**

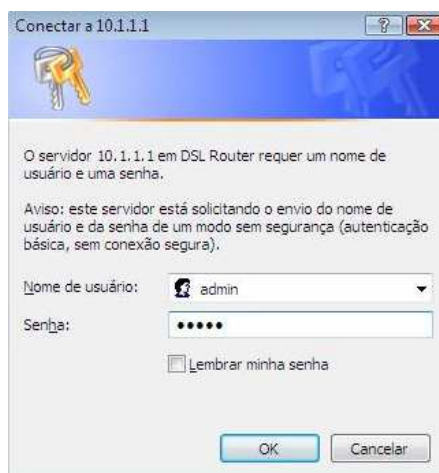



Selecione a opção “**Advanced Setup**” e em seguida clique em **WAN** localizada no menu do lado esquerdo.



Na tela seguinte selecione a opção “**Edit**”.

Wide Area Network (WAN) Setup

Choose Add, Edit, or Remove to configure WAN interfaces.
Choose Save/Reboot to apply the changes and reboot the system.

VPI/VCI	Con. ID	Category	Service	Interface	Protocol	Igmp	QoS	State	Remove	Edit
7/35	1	UBR	pppoe_7_35_1	ppp_7_35_1	PPPoE	Disabled	Disabled	Enabled	<input type="checkbox"/>	Edit
8/35	1	UBR	br_8_35	nas_8_35	Bridge	N/A	Disabled	Enabled	<input type="checkbox"/>	Edit

Na tela seguinte clique em **Next**.

ATM PVC Configuration

This screen allows you to configure an ATM PVC identifier (VPI and VCI) and select a service category. Otherwise choose an existing interface by selecting the checkbox to enable it.

VPI: [0-255]

VCI: [0-65535]

Service Category:

Enable Quality Of Service

Enabling packet level QoS for a PVC improves performance for selected classes of applications. QoS cannot be set for CBR and Realtime VBR. QoS consumes system resources; therefore the number of PVCs will be reduced. Use **Advanced Setup/Quality of Service** to assign priorities for the applications.

Enable Quality Of Service

Em seguida selecione a opção **PPP over Ethernet (PPPoE)** e em seguida clique no botão **Next**.



Connection Type

Select the type of network protocol for IP over Ethernet as WAN interface

- PPP over ATM (PPPoA)
- PPP over Ethernet (PPPoE)
- MAC Encapsulation Routing (MER)
- IP over ATM (IPoA)
- Bridging

Encapsulation Mode

LLC/SNAP-BRIDGING ▾

[Back](#) [Next](#)

Na tela seguinte preencha os campos:

PPP Username: Nome da usuário de acesso a Internet

PPP Password: Senha de acesso a Internet

PPPoE Service Name: Speedy

Em seguida clique em **Next**.

PPP Username and Password

PPP usually requires that you have a user name and password to establish your connection. In the boxes below, enter the user name and password that your ISP has provided to you.

PPP Username:
PPP Password:
PPPoE Service Name:
Authentication Method:

- Dial on demand (with idle timeout timer)
- PPP IP extension
- Use Static IP Address
- Retry PPP password on authentication error
- Enable PPP Debug Mode
- Bridge PPPoE Frames Between WAN and Local Ports (Default: Enabled)

[Back](#) [Next](#)

Na tela seguinte selecione a opção **Enable NAT** e em seguida clique em **Next**.

Network Address Translation Settings

Network Address Translation (NAT) allows you to share one Wide Area Network (WAN) IP address for multiple computers on your Local Area Network (LAN).

Enable NAT

Enable Firewall

Enable IGMP Multicast, and WAN Service

Enable IGMP Multicast

Enable WAN Service

Service Name:

[Back](#) [Next](#)

Na tela seguinte visualize os parâmetros configurados, e em seguida clique em **Save**.

WAN Setup - Summary

Make sure that the settings below match the settings provided by your ISP.

VPI / VCI:	8 / 35
Connection Type:	PPPoE
Service Name:	br_8_35
Service Category:	UBR
IP Address:	Automatically Assigned
Service State:	Enabled
NAT:	Enabled
Firewall:	Disabled
IGMP Multicast:	Disabled
Quality Of Service:	Disabled

Click "Save" to save these settings. Click "Back" to make any modifications.
NOTE: You need to reboot to activate this WAN interface and further configure services over this interface.

[Back](#) [Save](#)

Para salvar a configuração realizada selecione a opção **Management** e em seguida selecione **Save/Reboot**.

- Management
- Settings
- System Log
- TR-069 Client
- Internet Time
- Access Control
- Update Software
- Save/Reboot**

Clique no botão **Save/Reboot** para finalizar a configuração.

Click the button below to save and reboot the router.

[Save/Reboot](#)